

DHA 280 E4P 30


130107

- Horizontal discharge centrifugal fan
- Backward curved impeller
- Housing made of aluminium AlMg3
- Robust single phase AC motor, voltage controllable
- Integrated thermal switch
- Integrated device switch



FAN CURVES

Name	Value	Unit
Volume flow	0	m ³ /h
Pressure	0	Pa

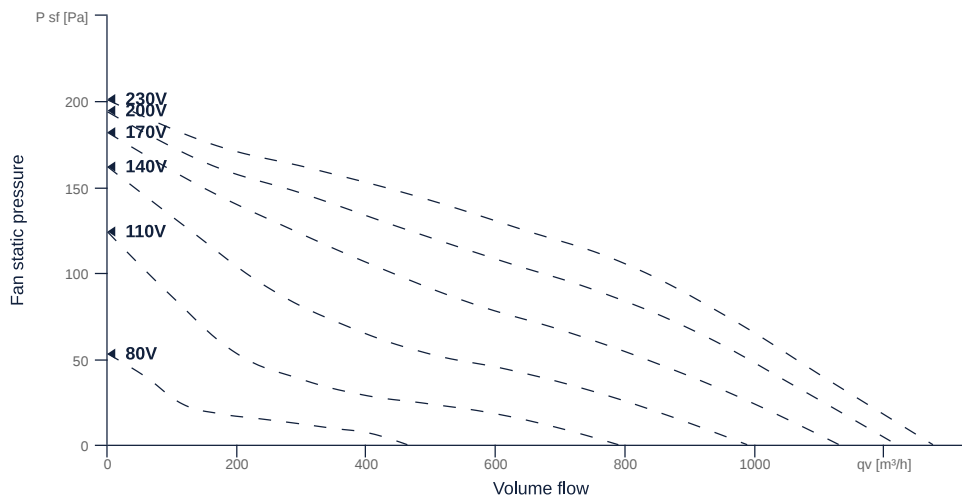

DHA 280 E4P 30

130107

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compt}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	8.23	kg	m
Nominal air flow rate, nominal point m ³ /h	846	m ³ /h	q _{v,nom}
Nominal external pressure, static	98	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.24	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	0.08	kW	P _{e,nom}
Face velocity, nominal point	20.2	m/s	v _{nom}
Nominal external pressure, static	98	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	29.9	%	η _{es,SUP}
Enclosure sound level, nominal point	71	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

DHA 280 E4P 30

130107

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	86	109	W	P _{ed, max}
Max. operating current (device)	0.44	0.54	A	I _{ed, max}
Max. speed	1390	1620	1/min	n _{max}
Max. stat. efficiency	27.2	25.3	%	η _{es}
Max. fan efficiency	27.9	25.7	%	η _e
Max. flowrate	1270	1450	m ³ /h	Q _{v, max}
Max. stat pressure	200	270	Pa	p _{st, max}
Max. medium temperature	70	70	°C	T _{m, max}
Max. environment temperature	70	70	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	V	U _{min}
Stall current	0.57	0.57	A	I _{LRA}


MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP33		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwsup _{motor}
Capacity capacitor		3	μF	C _{cond}
Voltage capacitor		450	V	V _{Ucond}
Number of poles (1)		4.000000		num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.48		A	I _{rated, f1}
Speed	1368		1/min	n _{f1}
Efficiency	51		%	η _{m, f1}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.990000	0.000000		cos φ
UL-Certification motor		None		ULcert

DHA 280 E4P 30

130107

ruck

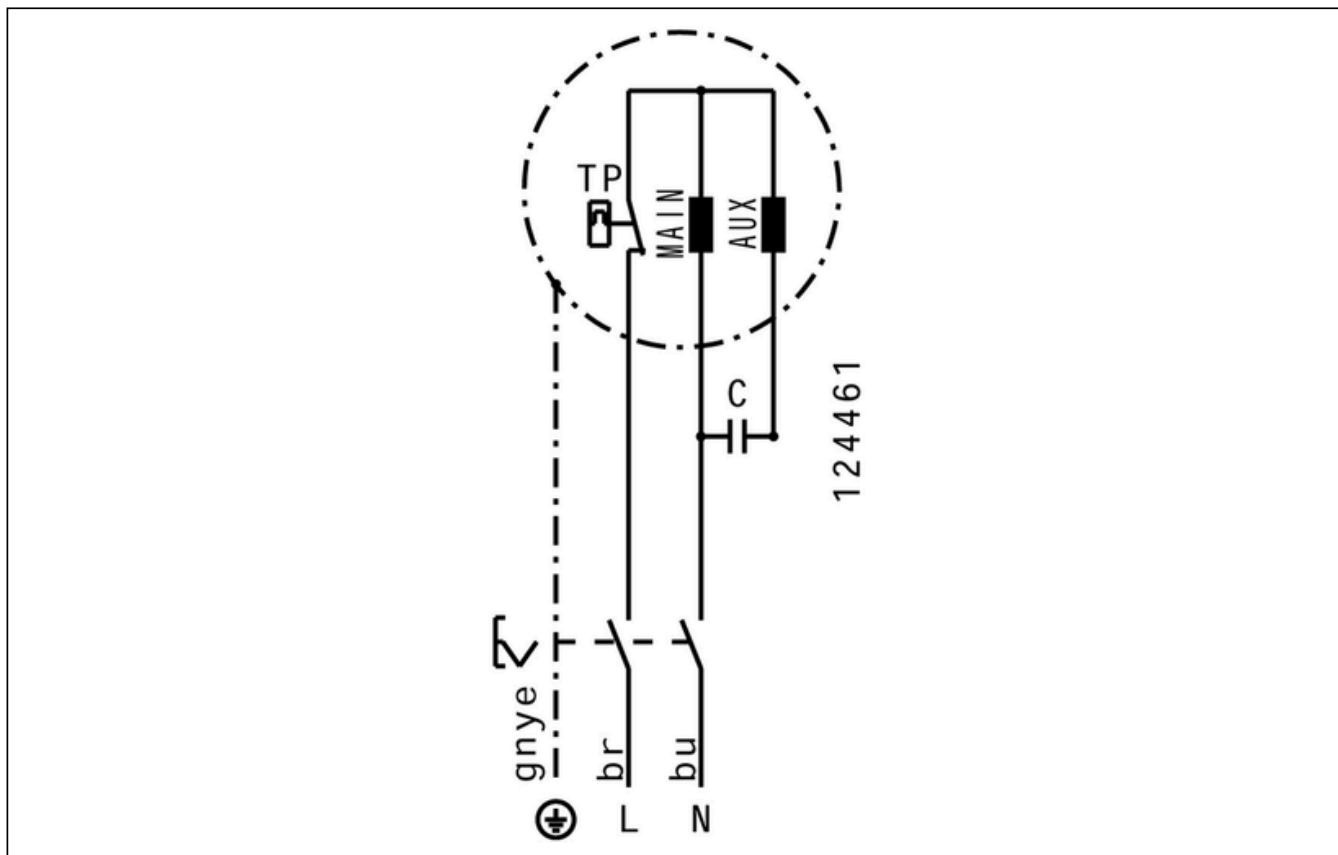

DHA 280 E4P 30

130107

MECHANICAL ACCESSORIES

DVK 250 10 | 152997



- Automatic roof shutter
- Galvanized steel sheet

DAS 250 | 109413



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 250 | 110585



- Roof inlet flange
- Galvanized steel sheet

DAF 200 | 110737



- Roof inlet flange
- Galvanized steel sheet

DSF 280-10 | 126164




- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DSF 280-12 | 133736



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DAP 280 | 133954



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 280-10 | 126383



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 280-12 | 134357



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

ELECTRICAL ACCESSORIES

TES 0145 | 111858



- Step transformer
- 230 V ~, 50/60 Hz

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz